
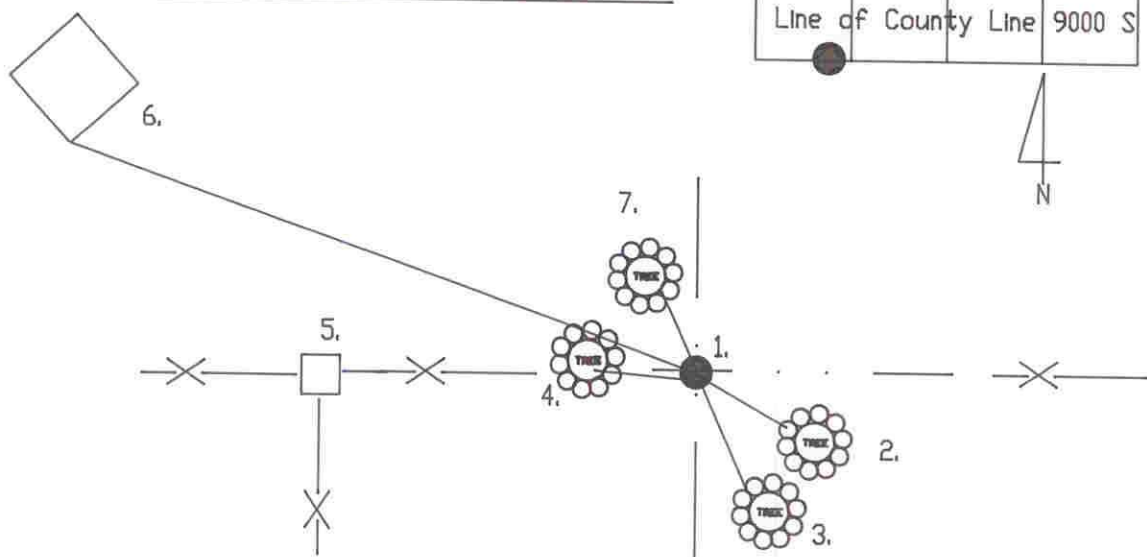


OFFICE OF THE MARION COUNTY SURVEYOR
 SECTION RECORD CORNER
 SECTION 19 TOWNSHIP 14 RANGE 3
 DATE: 6-5-96
 PARTY CHIEF: Wilcoxon
 CREW: _____
 TYPE OF MARKER: Harrison w/sign post
 METHOD OF ESTABLISHMENT: County: 3-11-83
'96 chain

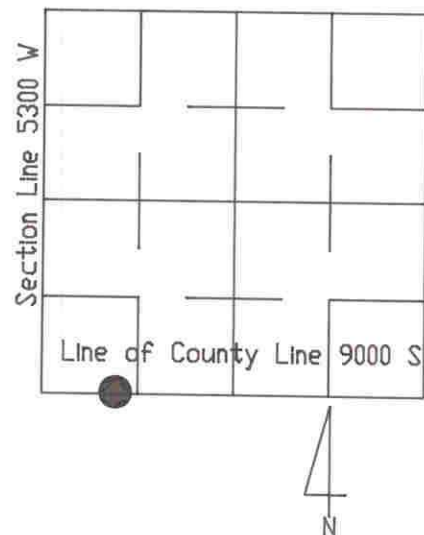

Set on section line as witness to S Q 19-14-3, since, said corner falls in the water.
 S Q 19-14-3 computed using single proportionate measurement (based on original gov't
 distances) btwn SW 19-14-3 (stone fd) and SE 19-14-3 (calculated location falls in
 White River). SE 19-14-3 computed using single proportionate measurement btwn SW
 19-14-3 and S Q 20-14-3. Comparison check to said SE 19-14-3 was made with the
 Southerly extension of the W line NW Q 20-14-3 fd that the SE 19-14-3 as computed
 was only 0.3' off said Southerly extension. See MCS Job#820081 Report of Survey.

PX4319B

REF.	DISTANCE	DESCRIPTION
1.	0.60'	Due N to fence line
2.	8.79'	PK w/shiner N 8' hcaakberry 12'up
3.	15.95'	PK w/shiner W 18' walnut 12'up
4.	7.32'	PK w/shiner S 10' hcaakberry 12'up
5.	98'+/-	Due W to 6"x6" wooden corner post
6.	160.45'	Southerly most corner of High tension tower 1st brace 30'up
7.	4.25'	Pk w/shiner E spur root 30' walnut